

# COMMERCIAL LIGHT UTILITY VEHICLES



Shown with optional Yamaha Genuine Accessories.



# 60+ YEARS

## YAMAHA MOTOR CORPORATION

With Yamaha, every challenge is an opportunity for adventure with our rich pedigree of motor vehicles, including snowmobiles, scooters, ATVs, personal watercraft vehicles and so much more.



BOATS



MARINE ENGINES



GENERATORS



RECREATIONAL VEHICLES




MOTORCYCLES



WAVERUNNERS®



ALL-TERRAIN VEHICLES



SNOWMOBILES



INTELLIGENT MACHINERY



POWER ASSIST BICYCLES



REMOTELY PILOTED HELICOPTERS

UMAX® CARS	4 - 17	PARTS AND ACCESSORIES	28 - 29
DRIVE² CARS	18 - 27	SPECIFICATIONS	30 - 39

Shown with optional Yamaha Genuine Accessories.



# THE EASY CHOICE™ WHEN VERSATILITY, PERFORMANCE AND UTILITY MATTER.



With five color options, four-wheel brakes, luxurious bucket seats, an under-hood storage compartment and large 20" tires, all with quiet gas engines or efficient electric motors, you get the features of a hard-working utility vehicle with the feel of a golf car.



## DUMP BED WITH ONE-HAND TAILGATE RELEASE

Featuring an effortless dump bed lock and tailgate, your crew members will enjoy a 12.9 cu. ft. capacity with a max load of 800lbs.



## AUTOMOTIVE-STYLE DASH

Completely redesigned for today's professional with large cup holders, battery/fuel gauge, and a large storage area.



## LUXURIOUS BUCKET SEATS

Derived from our award-winning Viking® Side-by-Side, you can enjoy a comfortable ride with support that will last your entire work day.



# BUILD YOUR CUSTOM UMAX WITH VIBRANT COLOR OPTIONS



6 GLACIER



BLUESTONE

METALLIC



CARBON

METALLIC



EVERGREEN

METALLIC



CORAL RED

METALLIC 7





# ALL THE POWER OF YAMAHA IN ONE CAR

## GAS

## ELECTRIC

FEATURES	UMAX EFI
Rear Suspension	✔ Cradle-Smooth Suspension
Front Suspension	✔ Independent Suspension
Yamaha-Built Engine	✔ 402cc, low-emission single cylinder 60° incline HOV
Miles Per Gallon	✔ 45 mpg
Vehicle Capacity	✔ 1,500 lbs
Additional Features	✔ Quiet Operation

FEATURES	UMAX Li	UMAX AC
Rear Suspension	✔ Cradle-Smooth Suspension	✔ Cradle-Smooth Suspension
Front Suspension	✔ Independent Suspension	✔ Independent Suspension
Battery	✔ Lithium-Ion	✔ 6 - 8V Trojan T-105
Toyota MCU	✔ Standard	✔ Standard
Power Production	✔ 6.7 hp (5.0 kW)	✔ 6.7 hp (5.0 kW)
Delta-Q Charger	✔ Standard	✔ Standard
Additional Features	✔ Zero Maintenance — No Watering	✔ Time Tested Reliability





Combining Yamaha's signature power and ruggedness with cutting-edge lithium technology, UMAX Li is the efficient, stress-free choice for your golf course or utility needs. With a maintenance-free\* battery that's built to last, it offers greater longevity, more efficient charging, and a longer driving range to keep you going all day.

# THE TRIFECTA OF SPEED, RANGE AND RELIABILITY



\*No watering, no tightening.





AVAILABLE WITH UMAX EFI AND UMAX AC POWERTRAINS

RALLY



Our UMAX Rally® was expertly designed to get the job done, however big or small. Get the most of your work day with features like a lifted suspension, 23" tires wrapped around 12" V-window wheels and comes complete with a Yamaha Genuine front brush guard and fender flares.

# A UTILITY VEHICLE WITH ATTITUDE



LIFTED  
SUSPENSION

23 INCH  
TIRES

6 INCH  
CLEARANCE





From a dirt road at the farm to a paved pathway at the airport, this vehicle ensures success. With comfortable convertible seating, plenty of storage, and an edgy design, the UMAX Rally 2+2 can fit the demands of a variety of jobs.



**UMAX RALLY**  
STANDARD ACCESSORIES

**200 LB STORAGE CAPACITY**  
REAR FACING FOLD-DOWN SEAT KIT



**A COMFORTABLE RIDE  
BUILT FOR VERSATILITY**



# EVEN BOLDER COLOR OPTIONS FOR THE RALLY 2+2



BLUESTONE

METALLIC



CORAL RED

METALLIC



ONYX

METALLIC



CYAN



CARBON

METALLIC



TITAN

MATTE 17



# INNOVATIVE FEATURES AT EVERY TURN




With bold colors and modern body styling, our Drive<sup>2</sup> line-up looks better than ever, but the biggest change is the one you don't see—a smoother ride.

**DRIVE<sup>2</sup>**




## STORAGE BIN AND USB CONNECTIONS

Large dash storage bin with anti-slip mat to keep valuables in place and two USB connections to maintain power and stay charged on the go.

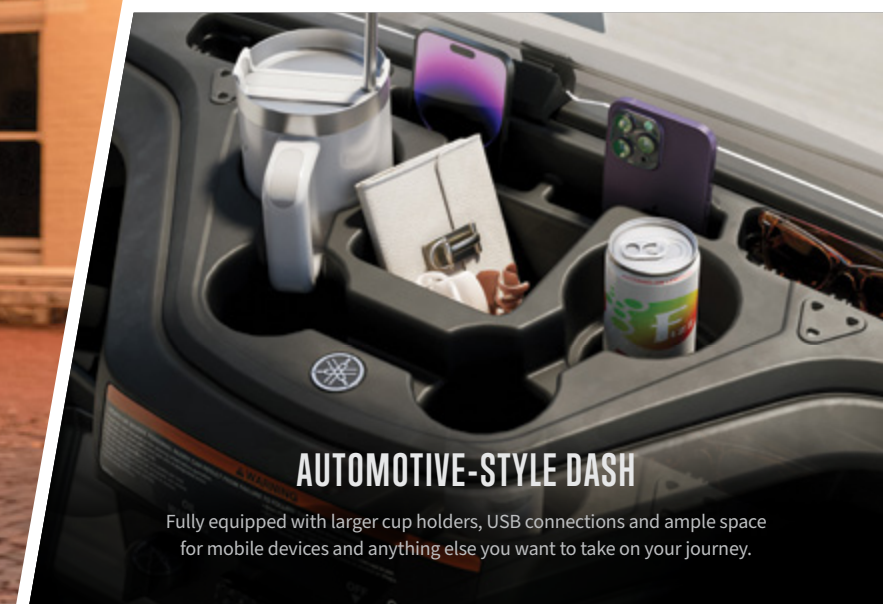

## AUTOMOTIVE-STYLE DASH

Fully equipped with larger cup holders, USB connections and ample space for mobile devices and anything else you want to take on your journey.

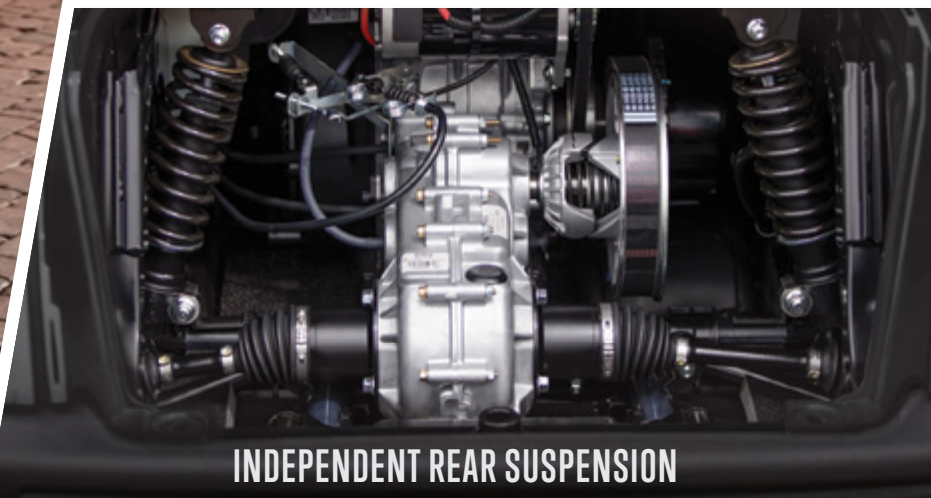

## INDEPENDENT REAR SUSPENSION

Experience stability and comfort. Standard on all Drive<sup>2</sup> PowerTech Li, Drive<sup>2</sup> PowerTech AC and Drive<sup>2</sup> QuieTech EFI models.





GLACIER

IN-MOLD



ARCTIC DRIFT

METALLIC



CORAL RED

METALLIC



ONYX

METALLIC



PEARL

METALLIC



PERIDOT

METALLIC



CARBON

METALLIC



TITAN

MATTE 21



# WHATEVER THE JOB, YAMAHA HAS IT COVERED



## GAS

## ELECTRIC

You can't go wrong with superior gas and electric solutions, all standard with independent front and rear suspension, USB ports, and padded steering wheels. If you prefer gas, the Drive<sup>2</sup> QuieTech EFI provides the quietest ride of any gas car. If you prefer electric, experience the cutting edge of lithium electric vehicles with PowerTech Li, or the time-tested batteries of the PowerTech AC. No matter the job, we'll help you get it done with complete comfort and ease.

### FEATURES

- Rear Suspension
- Front Suspension
- Yamaha-Built Engine
- Miles Per Gallon
- Easy Access Engine Compartment
- Additional Features

### DRIVE<sup>2</sup> QUIETECH EFI

- ✔ Independent Suspension
- ✔ Independent Suspension
- ✔ 357cc, low-emission single cylinder 60° incline HOV
- ✔ 45 mpg
- ✔ Standard
- ✔ 60.5 dB engine noise

### FEATURES

- Rear Suspension
- Front Suspension
- Battery
- Toyota MCU
- Power Production
- Delta-Q Charger
- Additional Features

### DRIVE<sup>2</sup> POWERTECH Li

- ✔ Independent Suspension
- ✔ Independent Suspension
- ✔ Lithium-Ion
- ✔ Standard
- ✔ 4.4 hp (3.3 kW)
- ✔ Standard
- ✔ Zero Maintenance — No Watering

### DRIVE<sup>2</sup> POWERTECH AC

- ✔ Independent Suspension
- ✔ Independent Suspension
- ✔ 6 - 8V Trojan T-875 FLA
- ✔ Standard
- ✔ 4.4 hp (3.3 kW)
- ✔ Standard
- ✔ Time Tested Reliability



Whether you are giving a facility tour to clients or transporting guests around the hotel grounds, our Drive<sup>2</sup> Concierge 4 will always impress even the most discerning passengers. Make their first impression the best one with a smooth, quiet ride and the widest, most luxuriously comfortable seats in the industry.



**EXTRA STORAGE UNDER TWO BENCH SEATS MEANS YOU'LL NEVER HAVE TO MAKE A SECOND TRIP.**

**CONCIERGE 6**

We've outfitted both our four and six-seat Concierge models with a wealth of features to inspire the most enjoyable experiences for your riders.



**SETTING THE HIGHEST STANDARD FOR COMFORT**

Shown with optional Yamaha Genuine Accessories.

Where permitted by closed-community regulations or other local ordinance, the Personal Transportation Vehicle (PTV) shown is suitable for use on private/public roads with a maximum posted speed limit of 25 mph. It does not meet federal motor vehicle safety standards applicable to passenger cars.



# SUPER HAULER

## HARDWORKING AND READY TO HAUL ANYTHING

**DRIVE<sup>B</sup>** QUIETECH EFI  
POWERTECH AC  
POWERTECH IRS

AVAILABLE WITH QUIETECH EFI, POWERTECH LI AND AC POWERTRAINS

Whether you're replacing water heaters or setting up for the day's big event, this extra-large hauler will handle your load. With durable, low-maintenance engineering and a super-sized aluminum cargo bed, it'll save you more than a few trips, not to mention headaches.



**72" x 48"**  
ALUMINUM CARGO BED

**800 LB**  
CARGO CAPACITY





**DON'T EXPECT IT.  
DEMAND IT!®**

All Yamaha Genuine Parts and Accessories have a three-year limited warranty, unless otherwise specified.



**SHOP YAMAHA  
GENUINE PARTS  
AND ACCESSORIES**





## UMAX EFI

### DIMENSIONS

OVERALL LENGTH	119.4 in (303.0 cm)
OVERALL HEIGHT (NO SUN TOP)	48.54 in (123.3cm)
OVERALL HEIGHT (WITH SUN TOP)	71.6 in (182.5 cm)
OVERALL WIDTH	49.6 in (125.5 cm)
WHEELBASE	77.2 in (196.1 cm)
FRONT WHEEL TREAD	40.3 in (102.5 cm)
REAR WHEEL TREAD	40.2 in (102.0 cm)
MINIMUM GROUND CLEARANCE	4.5 in (11.5 cm)
CURB WEIGHT (WITH SUN TOP, BATTERY, OIL AND GASOLINE)	483 kg (1064 lb)

### GENERAL

FUEL TANK CAPACITY	5.2 US GAL (20 LITERS)
TIRE SIZE	20x10-10 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Glacier, Coral Red, Bluestone, Carbon, Evergreen
AVAILABLE SEAT COLORS	Black
AVAILABLE SUN TOP COLORS	Black
WARRANTY	Standard 2-year limited vehicle warranty

### ENGINE / DRIVE TRAIN

ENGINE TYPE	Yamaha-built 402 cc, Low Emission Single Cylinder 60° Incline OHV
LUBRICATION SYSTEM	Splash-style positive oil lubrication
OIL CAPACITY	1.16 U.S. quart (1.1 liter, 1100 cc), Yamalube 10W-30
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
FUEL SYSTEM	Electronic fuel injection
STARTING SYSTEM	Starter generator with pedal start system
HORSEPOWER	3600 rpm (14.25 hp)

### CHASSIS

FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, front and rear wheel drum brakes
CARGO BED MAX LOAD	800 lb
ROLLING TRAILER MAX WEIGHT	1,200 lb
MAX TONGUE WEIGHT	150 lb
VEHICLE RATED CAPACITY	1,500 lb
CARGO BED DIMENSIONS	41.1" L x 45.9" W x 11.8" H

### PERFORMANCE

MAX FORWARD SPEED	19.5 mph (31.4 km/h)
MAX REVERSE SPEED	13.1 mph (21 km/h)
MINIMUM TURNING RADIUS	4.0 m
G.V.W.	2,533 lb

## UMAX AC

### DIMENSIONS

OVERALL LENGTH	119.4 in (303.0 cm)
OVERALL HEIGHT (NO SUN TOP)	48.54 in (123.3 cm)
OVERALL HEIGHT (WITH SUN TOP)	71.6 in (182.5 cm)
OVERALL WIDTH	49.3 in (125.5 cm)
WHEELBASE	77.2 in (196.0 cm)
FRONT WHEEL TREAD	40.3 in (102.5 cm)
REAR WHEEL TREAD	40.2 in (102.0 cm)
MINIMUM GROUND CLEARANCE	4.5 in (11.5 cm)
CURB WEIGHT (WITH SUN TOP)	658 kg (1451 lb)

### GENERAL

TIRE SIZE	20x10-10 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Glacier, Coral Red, Bluestone, Carbon, Evergreen
AVAILABLE SEAT COLORS	Black
AVAILABLE SUN TOP COLORS	Black
WARRANTY	Standard 2-year limited vehicle warranty
STANDARD RECEIVER HITCH	2"

### MOTOR / DRIVE TRAIN

MOTOR	48-volt AC
OUTPUT RATING	6.7 hp (5.0 kW for 60 minutes)
MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
BATTERIES	Standard: Six 8-volt Trojan T-105 Batteries

### CHASSIS

FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, front and rear wheel drum brakes
CARGO BED MAX LOAD	800 lb
ROLLING TRAILER MAX WEIGHT	1,200 lb
MAX TONGUE WEIGHT	150 lb
VEHICLE RATED CAPACITY	1,500 lb
CARGO BED DIMENSIONS	41.1" L x 45.9" W x 11.8" H

### PERFORMANCE

MAX FORWARD SPEED	19.5 mph (31.4 km/h)
MAX REVERSE SPEED	6.2 mph (10 km/h)
MINIMUM TURNING RADIUS	4.0 m
G.V.W.	2,910 lb

## UMAX Li

### DIMENSIONS

OVERALL LENGTH	119.4 in (303.0 cm)
OVERALL HEIGHT (NO SUN TOP)	48.54 in (123.3 cm)
OVERALL HEIGHT (WITH SUN TOP)	71.6 in (182.5 cm)
OVERALL WIDTH	49.3 in (125.5 cm)
WHEELBASE	77.2 in (196.0 cm)
FRONT WHEEL TREAD	40.3 in (102.5 cm)
REAR WHEEL TREAD	40.2 in (102.0 cm)
MINIMUM GROUND CLEARANCE	4.5 in (11.5 cm)
CURB WEIGHT (WITH SUN TOP)	523 kg (1153 lb)

### GENERAL

TIRE SIZE	20x10-10 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Coral Red, Bluestone, Evergreen, Carbon, Glacier
AVAILABLE SEAT COLORS	Black
AVAILABLE SUN TOP COLORS	Black
WARRANTY	Standard 2-year limited vehicle warranty
STANDARD RECEIVER HITCH	2"

### MOTOR / DRIVE TRAIN

MOTOR	48-volt AC
OUTPUT RATING	6.7 hp (5.0 kW for 60 minutes)
MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
BATTERIES	RoyPow S51105PE (51-Volt)

### CHASSIS

FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, front and rear wheel drum brakes
CARGO BED MAX LOAD	800 lb
ROLLING TRAILER MAX WEIGHT	1,200 lb
MAX TONGUE WEIGHT	150 lb
VEHICLE RATED CAPACITY	1,500 lb
CARGO BED DIMENSIONS	41.1" L x 45.9" W x 11.8" H

### PERFORMANCE

MAX FORWARD SPEED	19.5 mph (31.4 km/h)
MAX REVERSE SPEED	6.2 mph (10 km/h)
MINIMUM TURNING RADIUS	4.0 m
G.V.W.	2,910 lb





## RALLY EFI

DIMENSIONS	
OVERALL LENGTH	122.6 in (311.5 cm)
OVERALL HEIGHT (NO SUN TOP)	50.7 in (128.8 cm)
OVERALL HEIGHT (WITH SUN TOP)	74.0 in (188 cm)
OVERALL WIDTH	53.5 in (136 cm)
WHEELBASE	77.4 in (196.5 cm)
FRONT WHEEL TREAD	41.3 in (105.0 cm)
REAR WHEEL TREAD	41.3 in (105.0 cm)
MINIMUM GROUND CLEARANCE	5.9 in (15.0 cm)
CURB WEIGHT (WITH SUN TOP, BATTERY, OIL AND GASOLINE)	501 kg (1105 lb)

GENERAL	
FUEL TANK CAPACITY	5.2 US GAL (20 LITERS)
TIRE SIZE	23x10.5-12 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Glacier, Coral Red, Bluestone, Carbon, Evergreen
AVAILABLE SEAT & SUN TOP COLOR	Black
WARRANTY	Standard 2-year limited vehicle warranty
STANDARD RECEIVER HITCH	2"

ENGINE / DRIVE TRAIN	
ENGINE TYPE	Yamaha-built 402 cc, Low Emission Single Cylinder 60° Incline OHV
LUBRICATION SYSTEM	Splash-style positive oil lubrication
OIL CAPACITY	1.16 U.S. quart (1.1 liter, 1100 cc), Yamalube 10W-30
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
FUEL SYSTEM	Electronic fuel injection
STARTING SYSTEM	Starter generator with pedal start system
HORSEPOWER	3600 rpm (14.25 hp)

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, front and rear wheel drum brakes
CARGO BED MAX LOAD	800 lb
ROLLING TRAILER MAX WEIGHT	1,500 lb
MAX TONGUE WEIGHT	150 lb
VEHICLE RATED CAPACITY	1,500 lb
CARGO BED DIMENSIONS	41.1" L x 45.9" W x 11.8" H

PERFORMANCE	
MAX FORWARD SPEED	19.5 mph (31.4 km/h)
MAX REVERSE SPEED	13.1 mph (21 km/h)
MINIMUM TURNING RADIUS	4.0 m
G.V.W.	2,533 lb

## RALLY AC

DIMENSIONS	
OVERALL LENGTH	122.5 in (311.5 cm)
OVERALL HEIGHT (NO SUN TOP)	50.7 in (128.8 cm)
OVERALL HEIGHT (WITH SUN TOP)	74.02 in (188 cm)
OVERALL WIDTH	53.5 in (136 cm)
WHEELBASE	77.3 in (196.5 cm)
FRONT WHEEL TREAD	41.3 in (104.8 cm)
REAR WHEEL TREAD	41.3 in (104.8 cm)
MINIMUM GROUND CLEARANCE	5.9 in (15.0 cm)
CURB WEIGHT (WITH SUN TOP)	676 kg (1490 lb)

GENERAL	
TIRE SIZE	23x10.5-12 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Glacier, Coral Red, Bluestone, Carbon, Evergreen
AVAILABLE SEAT & SUN TOP COLOR	Black
WARRANTY	Standard 2-year limited vehicle warranty
STANDARD RECEIVER HITCH	2"

MOTOR / DRIVE TRAIN	
MOTOR	48-volt AC
OUTPUT RATING	6.7 hp (5.0 kW)
MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
BATTERIES	Standard: Eight 6-volt Trojan T-105 Batteries

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, front and rear wheel drum brakes
CARGO BED MAX LOAD	800 lb
ROLLING TRAILER MAX WEIGHT	1,500 lb
MAX TONGUE WEIGHT	150 lb
VEHICLE RATED CAPACITY	1,500 lb
CARGO BED DIMENSIONS	41.1" L x 45.9" W x 11.8" H

PERFORMANCE	
MAX FORWARD SPEED	19.5 mph (31.4 km/h)
MAX REVERSE SPEED	6.2 mph (10 km/h)
MINIMUM TURNING RADIUS	4.0 m
G.V.W.	2,910 lb

## RALLY<sup>2+2</sup> EFI

DIMENSIONS	
OVERALL LENGTH	134.4 in (341.5 cm)
OVERALL HEIGHT (NO SUN TOP)	57.48 in (146 cm)
OVERALL HEIGHT (WITH SUN TOP)	77.20 in (196.0 cm)
OVERALL WIDTH	53.5 in (136 cm)
WHEELBASE	77.4 in (196.5 cm)
FRONT WHEEL TREAD	41.3 in (105.0 cm)
REAR WHEEL TREAD	41.3 in (105.0 cm)
MINIMUM GROUND CLEARANCE	5.9 in (15.0 cm)
CURB WEIGHT	610 kg (1345 lb)

GENERAL	
FUEL TANK CAPACITY	5.2 US GAL (20 LITERS)
TIRE SIZE	23x10.5-12 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Four persons
AVAILABLE MODEL COLORS	Glacier, Coral Red, Bluestone, Cyan, Onyx, Carbon Matte: Titan
AVAILABLE SEAT & SUN TOP COLOR	Black
WARRANTY	Standard 2-year limited vehicle warranty

MOTOR / DRIVE TRAIN	
ENGINE TYPE	Yamaha-built 402 cc, Low Emission Single Cylinder 60° Incline OHV
LUBRICATION SYSTEM	Splash-style positive oil lubrication
OIL CAPACITY	1.16 U.S. quart (1.1 liter, 1100 cc), Yamalube 10W-30
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
FUEL SYSTEM	Electronic fuel injection
STARTING SYSTEM	Starter generator with pedal start system
HORSEPOWER	3600 rpm (14.25 hp)

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
BRAKES	Mechanical, 4-wheel drum
FLIP-SEAT CARGO BED MAX LOAD	250 lb
MAXIMUM COMBINED LOAD WITH TWO PASSENGERS AND CARGO	400 lb
VEHICLE RATED CAPACITY	1,000 lb

PERFORMANCE	
MAX FORWARD SPEED	15 mph (24.1 km/h)
MAX REVERSE SPEED	11.2 mph (18 km/h)
MINIMUM TURNING RADIUS	4.0 m
G.V.W.	2,717 lb

## RALLY<sup>2+2</sup> AC

DIMENSIONS	
OVERALL LENGTH	134.4 in (341.5 cm)
OVERALL HEIGHT (NO SUN TOP)	57.48 in (146 cm)
OVERALL HEIGHT (WITH SUN TOP)	77.20 in (196.0 cm)
OVERALL WIDTH	53.54 in (136 cm)
WHEELBASE	77.4 in (196.5 cm)
FRONT WHEEL TREAD	41.3 in (105.0 cm)
REAR WHEEL TREAD	41.3 in (105.0 cm)
MINIMUM GROUND CLEARANCE	5.9 in (15.0 cm)
CURB WEIGHT	779 kg (1717 lb)

GENERAL	
TIRE SIZE	23x10.5-12 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Four persons
AVAILABLE MODEL COLORS	Glacier, Coral Red, Bluestone, Cyan, Onyx, Carbon Matte: Titan
AVAILABLE SEAT & SUN TOP COLOR	Black
WARRANTY	Standard 2-year limited vehicle warranty

MOTOR / DRIVE TRAIN	
MOTOR	48-volt AC
OUTPUT RATING	6.7 hp (5.0 kW for 60 minutes)
MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
BATTERIES	Standard: Eight 6-volt Trojan T-105 Batteries

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
BRAKES	Mechanical, 4-wheel drum
CARGO BED MAX LOAD	-
ROLLING TRAILER MAX WEIGHT	1,200 lb
MAX TONGUE WEIGHT	400 lb
VEHICLE RATED CAPACITY	1,000 lb
CARGO BED DIMENSIONS	-

PERFORMANCE	
MAX FORWARD SPEED	15 mph (24.1 km/h)
MAX REVERSE SPEED	6.2 mph (10 km/h)
MINIMUM TURNING RADIUS	4.0 m
G.V.W.	2,345 lb



## SUPER HAULER QUIETECH EFI

DIMENSIONS	
OVERALL LENGTH	142.9 in (363 cm)
OVERALL WIDTH	53.5 in (136 cm)
OVERALL HEIGHT (NO SUN TOP)	48.8 in (124 cm)
WHEELBASE	98 in (249 cm)
FRONT WHEEL TREAD	34.6 in (88 cm)
REAR WHEEL TREAD	39.8 in (101 cm)
MINIMUM GROUND CLEARANCE	6.3 in (16 cm)
CURB WEIGHT (WITH BATTERY, OIL AND GASOLINE)	447 kg (985 lb)
FLOOR BOARD HEIGHT	13.4 in (34 cm)

GENERAL	
FUEL TANK CAPACITY	22 liters (5.8 gallons)
TIRE SIZE	205/65-10 4-PLY
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Glacier
AVAILABLE SEAT COLORS	Standard: Black   Optional: Stone
AVAILABLE SUN TOP COLOR	Standard: Black
WARRANTY	Standard 2-year limited vehicle warranty

ENGINE / DRIVE TRAIN / POWER SUPPLY	
ENGINE TYPE	Yamaha-built, 357 cc, low-emission single cylinder 60° incline OHV
LUBRICATION SYSTEM	Splash-style positive oil lubrication
OIL CAPACITY	1 U.S. quart (1 liter, 1000 cc)
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
FUEL SYSTEM	Electronic Fuel Injection
STARTING SYSTEM	Starter generator with pedal start system

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier color
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Fully independent automotive-style strut suspension
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

CARGO BED SIZE	
LENGTH	70 in (177.9 cm)
WIDTH	47 in (119.4 cm)
HEIGHT	7.8 in (20 cm)
CARGO BED CAPACITY	800 lb

PERFORMANCE	
MAX SPEED ADJUSTABLE	19 mph (31 km/h)
MINIMUM TURNING RADIUS	14.4 ft (4.4 m)

## SUPER HAULER POWERTECH AC

DIMENSIONS	
OVERALL LENGTH	142.9 in (363 cm)
OVERALL WIDTH	53.5 in (136 cm)
OVERALL HEIGHT (NO SUN TOP)	48.8 in (124 cm)
WHEELBASE	98 in (249 cm)
FRONT WHEEL TREAD	34.6 in (88 cm)
REAR WHEEL TREAD	38.2 in (97 cm)
MINIMUM GROUND CLEARANCE	5.5 in (14 cm)
CURB WEIGHT (WITH BATTERY)	594 kg (1310 lb)
FLOOR BOARD HEIGHT	13 in (33 cm)

GENERAL	
TIRE SIZE	205/65-10 4-PLY
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Glacier
AVAILABLE SEAT COLORS	Standard: Black   Optional: Stone
AVAILABLE SUN TOP COLOR	Standard: Black
WARRANTY	Standard 2-year limited vehicle warranty

MOTOR / DRIVE TRAIN	
MOTOR	48-volt AC
OUTPUT RATING	6.7 hp (5.0 kW)
MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
BATTERIES	Standard: Six 8-volt Trojan T-875 Batteries Optional: Eight 6-volt Trojan T-105 Batteries

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier color
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

CARGO BED SIZE	
LENGTH	70 in (177.9 cm)
WIDTH	47 in (119.4 cm)
HEIGHT	7.8 in (20 cm)
CARGO BED CAPACITY	800 lb

PERFORMANCE	
MAX SPEED ADJUSTABLE	19 mph (30.5 km/h)
MINIMUM TURNING RADIUS	14.4 ft (4.4 m)

## SUPER HAULER POWERTECH Li

DIMENSIONS	
OVERALL LENGTH	142.9 in (363 cm)
OVERALL WIDTH	53.5 in (136 cm)
OVERALL HEIGHT (NO SUN TOP)	48.8 in (124 cm)
WHEELBASE	98 in (249 cm)
FRONT WHEEL TREAD	34.6 in (88 cm)
REAR WHEEL TREAD	38.2 in (97 cm)
MINIMUM GROUND CLEARANCE	5.5 in (14 cm)
CURB WEIGHT (WITH BATTERY)	594 kg (1310 lb)
FLOOR BOARD HEIGHT	13 in (33 cm)

GENERAL	
TIRE SIZE	205/65-10 4-PLY
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Glacier
AVAILABLE SEAT COLORS	Standard: Black   Optional: Stone
AVAILABLE SUN TOP COLOR	Standard: Black
WARRANTY	Standard 2-year limited vehicle warranty

MOTOR / DRIVE TRAIN	
MOTOR	48-volt AC
OUTPUT RATING	4.4 hp (3.3 kW)
MOTOR CONTROL UNIT	Toyota Industries-built motor controller unit
BATTERY	Lithium Iron Phosphate
CHARGER	Delta-Q Charger

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier color
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

CARGO BED SIZE	
LENGTH	70 in (177.9 cm)
WIDTH	47 in (119.4 cm)
HEIGHT	7.8 in (20 cm)
CARGO BED CAPACITY	800 lb

PERFORMANCE	
MAX SPEED ADJUSTABLE	15 mph (24 km/h)
MINIMUM TURNING RADIUS	14.4 ft (4.4 m)

## CONCIERGE 4 QUIETECH EFI

DIMENSIONS	
OVERALL LENGTH	127.2 in (323 cm)
OVERALL WIDTH	47.2 in (120 cm)
OVERALL HEIGHT (NO SUN TOP)	48.8 in (124 cm)
WHEELBASE	98 in (249 cm)
FRONT WHEEL TREAD	34.6 in (88 cm)
REAR WHEEL TREAD	38.2 in (97 cm)
MINIMUM GROUND CLEARANCE	5.9 in (15 cm)
CURB WEIGHT (WITH SUN TOP, BATTERY, OIL AND GASOLINE)	458 kg (1010 lb)
FLOOR BOARD HEIGHT	13.4 in (34 cm)

GENERAL	
FUEL TANK CAPACITY	22 liters (5.8 gallons)
TIRE SIZE	205/65-10 4-PLY
SEATING CAPACITY	Four persons
AVAILABLE MODEL COLORS	In-Mold: Glacier, Metallic: Peridot, Onyx, Coral Red, Carbon, Matte: Titan, Arctic Drift
AVAILABLE SEAT COLORS	Standard: Stone   Optional: Black
AVAILABLE SUN TOP COLOR	Stone, Black, White
WARRANTY	Standard 2-year limited vehicle warranty

ENGINE / DRIVE TRAIN / POWER SUPPLY	
ENGINE TYPE	Yamaha-built, 357 cc, low-emission single cylinder 60° incline OHV
LUBRICATION SYSTEM	Splash-style positive oil lubrication
OIL CAPACITY	1 U.S. quart (1 liter, 1000 cc)
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
FUEL SYSTEM	Electronic Fuel Injection
STARTING SYSTEM	Starter generator with pedal start system

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier color. Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Fully independent automotive-style strut suspension
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

PERFORMANCE	
MAX FORWARD SPEED	19 mph (31 km/h)
MINIMUM TURNING RADIUS	14.4 ft (4.4 m)



## CONCIERGE 4 POWERTECH AC

DIMENSIONS	
OVERALL LENGTH	127.2 in (323 cm)
OVERALL WIDTH	47.2 in (120 cm)
OVERALL HEIGHT (NO SUN TOP)	48.8 in (124 cm)
WHEELBASE	98 in (249 cm)
FRONT WHEEL TREAD	34.6 in (88 cm)
REAR WHEEL TREAD	38.2 in (97 cm)
MINIMUM GROUND CLEARANCE	5.5 in (14 cm)
DRY WEIGHT (WITH SUN TOP, FLOODED BATTERY)	564 kg (1,243 lb)
FLOOR BOARD HEIGHT	13 in (33 cm)

GENERAL	
TIRE SIZE	205/65-10 4-PLY
SEATING CAPACITY	Four persons
AVAILABLE MODEL COLORS	In-Mold: Glacier, Metallic: Peridot, Onyx, Coral Red, Carbon, Matte: Titan, Arctic Drift
AVAILABLE SEAT COLORS	Standard: Stone   Optional: Black
AVAILABLE SUN TOP COLOR	Stone, Black, White
WARRANTY	Standard 2-year limited vehicle warranty

ENGINE / DRIVE TRAIN	
MOTOR	48-volt AC
OUTPUT RATING	6.7 hp (5.0 kW)
MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
BATTERIES	Standard: Six 8-volt Trojan T-875 Batteries Optional: Eight 6-volt Trojan T-105 Batteries

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier color. Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

PERFORMANCE	
MAX FORWARD SPEED	19 mph (31 km/h)
MINIMUM TURNING RADIUS	14.4 ft (4.4 m)

## CONCIERGE 4 POWERTECH Li

DIMENSIONS	
OVERALL LENGTH	127.2 in (323 cm)
OVERALL WIDTH	47.2 in (120 cm)
OVERALL HEIGHT (NO SUN TOP)	48.8 in (124 cm)
WHEELBASE	98 in (249 cm)
FRONT WHEEL TREAD	34.6 in (88 cm)
REAR WHEEL TREAD	38.2 in (97 cm)
MINIMUM GROUND CLEARANCE	5.5 in (14 cm)
DRY WEIGHT (WITH SUN TOP, FLOODED BATTERY)	564 kg (1,243 lb)
FLOOR BOARD HEIGHT	13 in (33 cm)

GENERAL	
TIRE SIZE	205/65-10 4-PLY
SEATING CAPACITY	Four persons
AVAILABLE MODEL COLORS	In-Mold: Glacier, Metallic: Peridot, Onyx, Coral Red, Carbon, Matte: Titan, Arctic Drift
AVAILABLE SEAT COLORS	Standard: Stone   Optional: Black
AVAILABLE SUN TOP COLOR	Stone, Black, White
WARRANTY	Standard 2-year limited vehicle warranty

MOTOR / DRIVE TRAIN	
MOTOR	48-volt AC
OUTPUT RATING	4.4 hp (3.3 kW)
MOTOR CONTROL UNIT	Toyota Industries-built motor controller unit
BATTERY	Lithium Iron Phosphate
CHARGER	Delta-Q Charger

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier color. Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

PERFORMANCE	
MAX FORWARD SPEED	15 mph (24 km/h)
MINIMUM TURNING RADIUS	14.4 ft (4.4 m)

## CONCIERGE 6 QUIETECH EFI

DIMENSIONS	
OVERALL LENGTH	161 in (409 cm)
OVERALL WIDTH	47.3 in (120 cm)
OVERALL HEIGHT (NO SUN TOP)	48.8 in (124 cm)
WHEELBASE	131.9 in (335 cm)
FRONT WHEEL TREAD	34.6 in (88 cm)
REAR WHEEL TREAD	38.2 in (97 cm)
MINIMUM GROUND CLEARANCE	5.9 in (15 cm)
CURB WEIGHT (WITH SUN TOP, BATTERY, OIL AND GASOLINE)	540 kg (1190 lb)
FLOOR BOARD HEIGHT	13.4 in (34 cm)

GENERAL	
FUEL TANK CAPACITY	22 liters (5.8 gallons)
TIRE SIZE	205/65-10 4-PLY
SEATING CAPACITY	Six persons
AVAILABLE MODEL COLORS	In-Mold: Glacier, Metallic: Peridot, Onyx, Coral Red, Carbon, Matte: Titan, Arctic Drift
AVAILABLE SEAT COLORS	Standard: Stone   Optional: Black
AVAILABLE SUN TOP COLOR	Stone, Black, White
WARRANTY	Standard 2-year limited vehicle warranty

ENGINE / DRIVE TRAIN / POWER SUPPLY	
ENGINE TYPE	Yamaha-built, 357 cc, low-emission single cylinder 60° incline OHV
LUBRICATION SYSTEM	Splash-style positive oil lubrication
OIL CAPACITY	1 U.S. quart (1 liter, 1000 cc)
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
FUEL SYSTEM	Electronic Fuel Injection
STARTING SYSTEM	Starter generator with pedal start system

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier color. Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Fully independent automotive-style strut suspension
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

PERFORMANCE	
MAX FORWARD SPEED	19 mph (31 km/h)
MINIMUM TURNING RADIUS	18.7 ft (5.7 m)

## CONCIERGE 6 POWERTECH AC

DIMENSIONS	
OVERALL LENGTH	161 in (409 cm)
OVERALL WIDTH	47.2 in (120 cm)
OVERALL HEIGHT (NO SUN TOP)	48.8 in (124 cm)
WHEELBASE	131.9 in (335 cm)
FRONT WHEEL TREAD	34.6 in (88 cm)
REAR WHEEL TREAD	38.2 in (97 cm)
MINIMUM GROUND CLEARANCE	5.5 in (14 cm)
CURB WEIGHT (WITH SUN TOP, FLOODED BATTERY)	628 kg (1384 lb)
FLOOR BOARD HEIGHT	13 in (33 cm)

GENERAL	
TIRE SIZE	205/65-10 4-PLY
SEATING CAPACITY	Six persons
AVAILABLE MODEL COLORS	In-Mold: Glacier, Metallic: Peridot, Onyx, Coral Red, Carbon, Matte: Titan, Arctic Drift
AVAILABLE SEAT COLORS	Standard: Stone   Optional: Black
AVAILABLE SUN TOP COLOR	Stone, Black, White
WARRANTY	Standard 2-year limited vehicle warranty

ENGINE / DRIVE TRAIN	
MOTOR	48-volt AC
OUTPUT RATING	6.7 hp (5.0 kW)
MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
BATTERIES	Standard: Six 8-volt Trojan T-875 Batteries Optional: Eight 6-volt Trojan T-105 Batteries

CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier color. Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

PERFORMANCE	
MAX FORWARD SPEED	19 mph (31 km/h)
MINIMUM TURNING RADIUS	18.7 ft (5.7 m)



## CONCIERGE 6 POWERTECH Li

### DIMENSIONS

OVERALL LENGTH	161 in (409 cm)
OVERALL WIDTH	47.2 in (120 cm)
OVERALL HEIGHT (NO SUN TOP)	48.8 in (124 cm)
WHEELBASE	131.9 in (335 cm)
FRONT WHEEL TREAD	34.6 in (88 cm)
REAR WHEEL TREAD	38.2 in (97 cm)
MINIMUM GROUND CLEARANCE	5.5 in (14 cm)
CURB WEIGHT (WITH SUN TOP, FLOODED BATTERY)	628 kg (1384 lb)
FLOOR BOARD HEIGHT	13 in (33 cm)

### GENERAL

TIRE SIZE	205/65-10 4-PLY
SEATING CAPACITY	Six persons
AVAILABLE MODEL COLORS	In-Mold: Glacier, Metallic: Peridot, Onyx, Coral Red, Carbon, Matte: Titan, Arctic Drift
AVAILABLE SEAT COLORS	Standard: Stone   Optional: Black
AVAILABLE SUN TOP COLOR	Stone, Black, White
WARRANTY	Standard 2-year limited vehicle warranty

### MOTOR / DRIVE TRAIN

MOTOR	48-volt AC
OUTPUT RATING	4.4 hp (3.3 kW)
MOTOR CONTROL UNIT	Toyota Industries-built motor controller unit
BATTERY	Lithium Iron Phosphate
CHARGER	Delta-Q Charger

### CHASSIS

FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier color. Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

### PERFORMANCE

MAX FORWARD SPEED	15 mph (24 km/h)
MINIMUM TURNING RADIUS	18.7 ft (5.7 m)



SEE MORE ONLINE!

Scan now to view warranty information.



Shown with optional Yamaha Genuine Accessories.

Where permitted by closed-community regulations or other local ordinance, the Personal Transportation Vehicle (PTV) shown is suitable for use on private/public roads with a maximum posted speed limit of 25 mph. It does not meet federal motor vehicle safety standards applicable to passenger cars.





1270 Chastain Road NW  
Kennesaw, Georgia 30144  
1.866.747.4027 | YamahaGolfCar.com



Scan for a digital  
copy of this brochure

This document contains many of the valuable trademarks and service marks owned and used by Yamaha throughout the world. The document may also contain references to other company, brand, and product names that may be the trademarks/service marks of their respective owners. Unless noted otherwise, these company, brand, and product names are used herein for identification purposes only, and reference to any names, marks, products, or services of third parties do not constitute or imply endorsement, sponsorship, or recommendation of the third party or the product or services. Products and specifications are subject to change without notice.