FLEET GOLF CARS

YAMAHA



0

THE EASY CHOICE[™] WHEN LUXURY, PERFORMANCE AND VALUE MATTER

DRIVE² CARS . THE COMFORT ZONE 4-19 UMAX[®] CARS.

EFT

YAMAHA

20-31 YAMATRACK®

34 - 35 .36 - 37

SPECIFICATIONS 38-43



YAMAHA MOTOR CORPORATION

With Yamaha, every challenge is an opportunity for adventure with our rich pedigree of motor vehicles, including snowmobiles, scooters, ATVs, personal watercraft vehicles and so much more.



EXPERIENCE THE COMFORT ZONE

SMOOTHEST RIDE LUXURIOUS AMENITIES

RELIABLE CUSTOMER SERVICE

Discover the pinnacle of comfort, elegance, and support with Yamaha Golf Cars.

Experience unmatched comfort with every drive—our advanced suspension and precise engineering deliver the smoothest ride for any terrain. Each car features refined amenities designed for convenience and style, offering a luxurious experience that feels tailor-made. Furthermore, our dedicated support team ensures reliable service every step of the way for total peace of mind.



INNOVATIVE FEATURES AT EVERY TURN



At Yamaha, we're innovating with today's golfer in mind. With bold colors and modern body styling, our Drive^2 lineup looks better than ever, but the biggest change is the one you don't see — a smoother ride.





STORAGE BIN WITH NO-SLIP MAT

34% larger to keep more valuables in place.

AUTOMOTIVE-STYLE DASH

3

Fully equipped with larger cup holders, a place for two range finders and mobile devices, plus optional USB connections.

INDEPENDENT REAR SUSPENSION

Experience stability and comfort. Standard on all Drive² PowerTech Li and Drive² QuieTech EFI models.

7

CUSTOMIZE YOUR FLEET WITH BOLD **COLOR OPTIONS**





BLUESTONE





EVERGREEN

IN-MOLD

CHOOSE YOUR DRIVE: IT'S A WIN-WIN

With two superior gas car options and three energy-efficient electric solutions, you simply can't go wrong. Take advantage of the ROI of gas with EFI or upgrade to the Drive² QuieTech EFI golf car to enjoy the lowest decibel output of any gas car. Experience the cutting edge of lithium electric vehicles with PowerTech Li. With valuable features like standard USB ports and a padded steering wheel, no matter which direction you go, your players will navigate terrain with complete comfort and ease.

GAS

COVERAGE AND IN COLUMN

ELECTRIC

VAMENA

FEATURES	DRIVE ² QUIETECH EFI	DRIVE ² EFI	FEATURES	DRIVE ² POWERTECH Li	DRIVE ² Li	DRIVE ² AC
Rear Suspension	S IRS	📀 Cradle-Smooth Suspension	Rear Suspension	🧭 IRS	Cradle-Smooth Suspension	🛛 🔮 Cradle-Smo
Yamaha-Built Engine	Standard	📀 Standard	Battery	S Lithium-ion	S Lithium-ion	🧹 T-875 FLA
Miles Per Gallon	🤣 45 mpg	🤣 45 mpg	Removable Body Panel	Standard 🥑	Standard	Standard 🧹
Easy Access Engine Compartment	Standard 🤣	Standard	Toyota MCU	Standard 🤝	Standard	Standard 🤝
Removable Body Panel	Standard 🤣	Standard	Delta-Q Charger	Standard Standard	Standard	Standard Standard
Reduced Engine Noise	📀 60.5 dB	📀 64.7 dB	Additional Features	😔 No Watering	🥑 No Watering	🥑 Time Testec




mooth Suspension ted FLA Batteries

EVERYTHING ELSE IS JUST NOISE

YAMAHA



Drive² QuieTech EFI boasts the lowest decibel output of any gas car and features the industry's first-ever Independent Rear Suspension on a golf car. This unprecedented combination ensures your players experience a luxuriously quiet ride. At 45 MPG, we think you'll agree that choosing QuieTech EFI is the clear way to go.

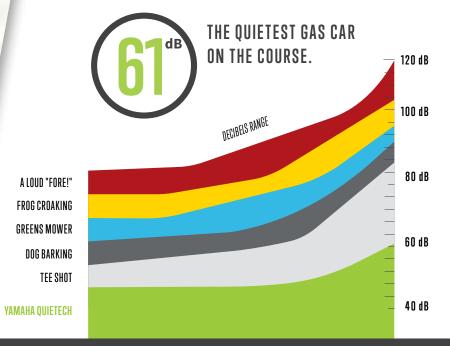

INDUSTRY-FIRST FULLY INDEPENDENT REAR SUSPENSION (IRS)





If you love the ROI of gas, but don't need the quiet ride of QuieTech, then our Drive2 EFI car will fit the bill. Our Yamaha-built engine brings you over 60 years of proven performance. With cradle-smooth suspension, the Drive² EFI car gives you both the luxury and the value you need, along with all the innovative features of the Drive² lineup.



GET MORE ROUNDS IN WITH INDUSTRY-LEADING FUEL ECONOMY AND LESS HYDROCARBON EMISSIONS.

See how much you could save using the Fuel Calculator at YamahaGolfCar.com

THE BEST OF RELIABILITY, DURABILITY AND COMFORT

*Body panels are available for all Drive² models f<u>or easy repairs.</u>

(1)

YAMAHA

LOWER YOUR MAINTENANCE COSTS AND DAMAGE REPAIRS WITH YAMAHA'S INDUSTRY-EXCLUSIVE REMOVABLE MODULAR BODY PANELS.





Shown with optional Yamaha Genuine Accessories.



POWERTECH Li

THE ONLY LITHIUM-ION-POWERED GOLF CAR WITH IRS



We engineered and optimized every last detail while creating an ideal balance between efficiency and driving comfort. For the first time ever, Independent Rear Suspension (IRS) now comes standard on all Drive² PowerTech Li models. With added comfort and premium shock absorption, players can now enjoy the smoothest ride yet.



DRIVE FARTHER AND SMOOTHER WITH INDEPENDENT REAR SUSPENSION.







n driven on a flat track.

Estimated based on 17Ah/day

No watering, no tightening



OPTIMIZED BY YAMAHA, THE LIFEPO4 BATTERIES ARE SAFER THAN Other lithium battery chemistry options. DRIVE

ALL-IN-ONE Electric solution

UNMATCHED POWER AND EFFICIENCY, EFFORTLESS UPKEEP

38 MILES DRIVING RANGE



YAMAHA



Shown with optional Yamaha Genuine Accessories.



3



FULLY INDEPENDENT FRONT SUSPENSION With automotive-style struts



Experience the unparalleled performance of lithium-ion drivetrain technology where cutting-edge meets low maintenance needs. With lightweight batteries and responsive acceleration, this golf car redefines efficiency, offering a seamless blend of power and comfort on every ride. Prepare yourself for an energy-efficient, electric solution that features smooth acceleration and unrivaled hill-climbing ability like you've never experienced before. Our electric cars make battery power synonymous with horsepower, while giving your players a silky smooth ride.



Shown with optional Yamaha Genuine Accessories





HARDWORKING FEATURES YIELD EFFICIENT RESULTS, DAY AFTER DAY



With five color options, four-wheel brakes, luxurious bucket seats, an under-hood storage compartment and large 20" tires, all with the quietness of a golf car, you can see the difference when power, performance, versatility and comfort matter.





DUMP BED WITH ONE-HAND TAILGATE RELEASE

Featuring an effortless dump bed lock and tailgate, your maintenance team will enjoy a 12.9 cu. ft. capacity with a max load of 800lbs.

AUTOMOTIVE-STYLE DASH

Completely redesigned for today's professional with large cup holders, battery/fuel gauge, and a large storage area.

LUXURIOUS BUCKET SEATS

Derived from our award-winning Viking[®] Side-by-Side, you can enjoy a comfortable ride with support that will last your entire work day.

BUILD YOUR CUSTOM UMAX WITH VIBRANT COLOR OPTIONS



BLUESTONE

10000



METALLIC



GAS

	FEATURES	U	JMAXI	li
sion	Rear Suspension		V	Cradle-Smooth Sus
on	Front Suspension		V	Independent Suspe
ngle	Battery		V	Lithium-Ion
V	Toyota MCU		V	Standard
	Power Production		V	6.7 hp (5.0 kW)
	Delta-Q Charger		V	Standard
	Additional Features		<u> </u>	Zero Maintenance -

ELECTRIC

ALL THE POWER OF YAMAHA IN ONE CAR

FEATURES	UMAX EFI	FEATURES
Rear Suspension	📀 Cradle-Smooth Suspension	Rear Su
Front Suspension	S Independent Suspension	Front S
Yamaha-Built Engine	✓ 402cc, low-emission single	Battery
	cylinder 60° incline HOV	Toyota
Miles Per Gallon	🤣 45 mpg	Power F
Vehicle Capacity	📀 1,500 lbs	Delta-Q
Additional Features	📀 Quiet Operation	Additio



	UMA	IX AC	
spension		Cradle-Smooth Suspension	
ension	V	Independent Suspension	
	V	6 - 8V Trojan T-105	
	V	Standard	
	V	6.7 hp (5.0 kW)	
	V	Standard	
— No Watering		Time Tested Reliability	25

THE TRIFECTA OF SPEED, RANGE AND RELIABILITY

AMAHA

UMBX

UMAX Li

NEW FOR 2025



Combining Yamaha's signature power and ruggedness with cutting-edge lithium technology, UMAX Li is the efficient, stress-free choice for your golf course or utility needs. With a maintenance-free* battery that's built to last, it offers greater longevity, more efficient charging, and a longer driving range to keep you going all day.



620

27



AVAILABLE WITH UMAX EFI AND UMAX LI POWERTRAINS

Outfitted with a strong diamond-webbed steel cage and an impact-resistant front windshield, discover the same Range Picker you already know and love—but this time, with an upgraded 402cc engine for premium torque and power.



TOUGH, RELIABLE YAMAHA-BUILT ENGINE WITH HIGH EFFICIENCY AND LOW EMISSIONS.

See how much you could save using the Fuel Calculator at YamahaGolfCar.com

SAFETY IS ENSURED WITH A DURABLE RANGE CAGE AND WINDSHIELD DESIGNED WITH HIGHER IMPACT-RESISTANCE, GREATER FLEXURAL STRENGTH AND MORE UV-RESISTANCE THAN EVER.

IT WILL BEAR THE BRUNT OF YOUR HARD DAY'S WORK

RANGE PICKER



Shown with optional Yamaha Genuine Accessories.

UMRX

29

DRIVE PROFITS WITH A COMPLETELY MOBILE SALES VESSEL

ADDITIONAL REAR SHELF

Easily prepare drinks with a convenient rear shelf.

30

UMAX

BISTRO

LOCKABLE AND REMOVABLE CASH DRAWER

Seamlessly integrated into the display cabinet, our solid steel cash drawer can be locked or easily removed.

Specially designed space in your cooler for snacks that need to stay dry and chilled.

SLIDING SNACK TRAY

Slanted shelves to perfectly display a variety of snacks and merchandise of your choice.

EASY ACCESS DISPLAY CASE

Two removable whiteboard menu boards to display your specials.



AVAILABLE WITH UMAX EFI AND UMAX LI POWERTRAINS

Serving your customers is now easier than ever. Our Standard UMAX[®] Bistro is designed to be the ultimate solution for convenience. Packed with features that do all of the work, from the sliding snack tray and the four-lid ice chest, the UMAX[®] Bistro ensures your refreshment offerings will stay organized and stored at the perfect temperature. A true extension of your clubhouse, the UMAX[®] Bistro is just another way to up your profits while keeping your players satisfied.



FOUR-LID ICE CHEST

With four separate coolers with stay-open hinges, you won't have to sacrifice counter space.



Add a coffee cambro, strut mount cup dispenser, or a potable ice chest with scoop for increased efficiency.

COMMAND YOUR RIDE WITH UNRELENTING POWER

Choose one of our two trusted battery options. No matter your choice, you are sure to have efficient, reliable power in all of your cars.




Trojan T-875 FLA PROVEN PERFORMANCE TIME AFTER TIME

This rock-solid power source is undeniably strong, dependable, and the perfect complement to our Yamaha golf car. It will get you where you need to go.

Vehicles compatible with this battery option: Drive² AC, Adventure Sport 2+2, UMAX Rally, UMAX Rally²⁺² and UMAX Two.



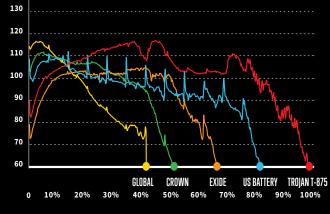

Discharge Cycles to 50% of Rated Capacity



LiFeP04 WE MADE A GREAT BATTERY BETTER

Our lithium-ion battery was manufactured by RoyPow[®] and optimized by Yamaha to ensure integrity and unmatched power. We've taken the time to engineer better overall performance for your long-term peace of mind.

Safer than other lithium battery chemistry options for long-term peace of mind.


Designed to charge at a speed that yields optimal output performance.

Even after the 5-year warranty, the battery could still have 80% amp-hour life remaining!

No water filling, no terminal tightening or cleaning.

Data is based on Yamaha's hilly course simulation (Competitors may show different data based on a different testing environment). Based on the averaging of two completed separate tests on two batteries for each brand.

Vehicles compatible with RoyPow[®] S51105PC: Drive² PowerTech Li, Li Drive² Concierge 4/6 Li, Adventurer SuperHauler Li Vehicles compatible with RoyPow[®] S51105PE

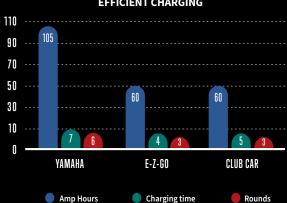

EFFICIENT CHARGING

• **YAMATRACK**®



- · Allow players to access your food and beverage menu anywhere on the course.
- · Reach your audience with customizable on-screen advertising.
- Increase course revenue by sharing advertising opportunities.

INCREASE FOOD AND BEVERAGE PROFITS

• Customize the App with your club logo and food and beverage menu.





- Use car tracking, shutdown, and lockdown features to show car's locations, prevent losses by day, and improve overnight security.
- based system.

If you have a Yamaha fleet, then we've already built your mobile app for you. Activating the app for your course is easy and convenient, and the mobile-based software allows your players to navigate their round no matter where they are on the course or in the game. The YamaTrack Player App assures players that support is just around the corner, so they can spend more energy on their game.

- Customize your course's mobile player app to include your club logo and food & beverage menu.
- Use the phone touchscreen to view the distance to hazards and greens.





YAMATRACK® DOES EVERYTHING BUT HIT THE SHOT



FLYOVER AUTO-START -0-AT EACH HOLE WITH DISTANCE TO HAZARDS





REMOTE FOOD -AND BEVERAGE ORDERING



The YamaTrack[®] app gives your course the capability to evolve with today's golfer. With a new 10" screen mounted in the dash, players will enjoy 3D terrain graphics with customizable pro tips. Geo-zones will notify players to pre-order food and beverages before making the turn. Enhance your players' experience and improve your course's efficiency. YamaTrack. Another reason why Yamaha is The Easy Choice.™

PROTECT YOUR ASSETS

- Monitor pace-of-play to keep the course running smoothly and efficiently.
- Monitor amp hours and car battery conditions automatically to improve fleet rotation and maximize battery life.
- Manage your entire operation from any internet-connected device with our web-



ENHANCE PLAYER EXPERIENCE

- 3D Flyovers of the player's current hole with accurate pin and hazard placement.
- Players can see the slope and contours of each golf hole.
- Players can quickly check the range of their shot anywhere on the course.
- · Allow players to easily keep track of their score on-screen.

THE YAMATRACK[®] PLAYER'S APP

- 3D Flyovers show the layout and contours of each golf hole.
- Track the distance of each drive from the tee to the fairway.





ENHANCE YOUR ROUND. DOWNLOAD THE FREE PLAYER APP TODAY



DON'T EXPECT IT. DEMAND IT!®

All Yamaha Genuine Parts and Accessories have a three-year limited warranty, unless otherwise specified.







SHOP YAMAHA Genuine Parts And Accessories

DRIVE² POWERTECH Li

DIMENSIONS

DIMENSIONS	
OVERALL LENGTH	93.6 in (238 cm)
OVERALL WIDTH	47.6 in (121 cm)
OVERALL HEIGHT (WITH SUN TOP)	70.6 in (179 cm)
WHEELBASE	64.4 in (164 cm)
FRONT WHEEL TREAD	34.7 in (88 cm)
REAR WHEEL TREAD	38.9 in (99 cm)
MINIMUM GROUND CLEARANCE	4.9 in (124 mm)
CURB WEIGHT (WITH SUN TOP, WINDSHIELD AND BATTERY)	341.3 kg (752 lb)

GENERAL

TIRE SIZE	18 x 8.5 - 8 (4-ply rating)	
SEATING CAPACITY	Two persons	
AVAILABLE MODEL COLORS	Sunstone, Evergreen, Bluestone, Carbon, Moonstone, Pearl, Glacier	
AVAILABLE SEAT & SUN TOP COLOR	Standard: Stone Optional: Black	
WARRANTY	Standard 4-year limited vehicle warranty	

MOTOR / DRIVE TRAIN / POWER SUPPLY

MOTOR	48-volt AC Motor	
OUTPUT RATING	4.4 hp (3.3kW)	
MOTOR CONTROL UNIT	Toyota Industries-built motor controller unit	
BATTERIES	Lithium Iron Phosphate	
CHARGER	Delta-Q Charger	

CHASSIS

CHASSIS	
FRAME	HybriCore [™] Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier and Sunstone colors. Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Fully independent automotive-style strut suspension
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

PERFORMANCE

MAX SPEED ADJUSTABLE	15.0 mph (24 km/h)
MINIMUM TURNING RADIUS	9.0 ft (2.8 m)

DRIVE² QUIETECH EFI

DIMENSIONS

	OVERALL LENGTH	93.6 in (238 cm)
	OVERALL WIDTH	47.3 in (120 cm)
	OVERALL HEIGHT (WITH SUN TOP)	70.2 in (178 cm)
	WHEELBASE	64.4 in (164 cm)
	FRONT WHEEL TREAD	34.8 in (88 cm)
	REAR WHEEL TREAD	38.3 in (97 cm)
	MINIMUM GROUND CLEARANCE	4.3 in (110 mm)
	CURB WEIGHT (WITH SUN TOP, BATTERY, OIL AND GASOLINE)	344 kg (758 lb)

GENERAL

FUEL TANK CAPACITY	5.8 U.S. gal (22 liters)
TIRE SIZE	18 x 8.5 - 8 (4-ply rating)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Sunstone, Evergreen, Bluestone, Carbon, Moonstone, Pearl, Glacier
AVAILABLE SEAT & SUN TOP COLOR	Standard: Stone Optional: Black
WARRANTY	Standard 4-year limited vehicle warranty

ENGINE / DRIVE TRAIN

ENGINE TYPE	Yamaha-built, 357 cc, low-emission single cylinder 60° incline OHV
OIL CAPACITY	1 liter, 1000 cc (1 U.S. quart)
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
STARTING SYSTEM	Starter generator with pedal start system
FUEL SYSTEM	EFI - Electronic Fuel Injection

CHASSIS

FRAME	HybriCore [™] Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier and Sunstone colors. Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Fully independent automotive-style strut suspension
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

PERFORMANCE

MAX SPEED ADJUSTABLE	15.0 mph (24 km/h)
MINIMUM TURNING RADIUS	9.2 ft (2.8 m)

DRIVE² AC

DIMENSIONS	
OVERALL LENGTH	93.6 in (238 cm)
OVERALL WIDTH	47.3 in (120 cm)
OVERALL HEIGHT (WITH SUN TOP)	70.2 in (178 cm)
WHEELBASE	64.4 in (164 cm)
FRONT WHEEL TREAD	34.8 in (89 cm)
REAR WHEEL TREAD	38.6 in (98 cm)
MINIMUM GROUND CLEARANCE	4.2 in (107 mm)
CURB WEIGHT (WITH SUN TOP AND BATTERY)	443 kg (977 lb)

GENERAL

TIRE SIZE	18 x 8.5 - 8 (4-ply rating)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Sunstone, Evergreen, Bluestone, Carbon, Moonstone, Pearl, Glacier
AVAILABLE SEAT & SUN TOP COLOR	Standard: Stone Optional: Black
WARRANTY	Standard 4-year limited vehicle warranty

MOTOR / DRIVE TRAIN / POWER SUPPLY

MOTOR	48-volt AC Motor
OUTPUT RATING	4.4 hp (3.3 kW)
MOTOR CONTROL UNIT	Toyota Industries-built motor controller unit
BATTERIES	Standard: Six 8-volt Motive T875
CHARGER	Delta-Q Charger

CHASSIS	
FRAME	HybriCore [™] Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier and Sunstone colors Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Swing arm with coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

PERFORMANCE MAX SPEED ADJUSTABLE 15.0 mph (24 km/h) MINIMUM TURNING RADIUS 9.2 ft (2.8 m)

DRIVE² Li

DIMENSIONS

OVERALL LENGTH	93.6 in (238 cm)
OVERALL WIDTH	47.6 in (121 cm)
OVERALL HEIGHT (WITH SUN TOP)	70.0 in (178 cm)
WHEELBASE	64.4 in (164 cm)
FRONT WHEEL TREAD	34.7 in (88 cm)
REAR WHEEL TREAD	38.9 in (99 cm)
MINIMUM GROUND CLEARANCE	4.3 in (109 mm)
CURB WEIGHT (WITH SUN TOP, WINDSHIELD AND BATTERY)	328 kg (723 lb)

GENERAL

TIRE SIZE	18 x 8.5 - 8 (4-ply rating)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Sunstone, Evergreen, Bluestone, Carbon, Moonstone, Pearl, Glacier
AVAILABLE SEAT & SUN TOP COLOR	Standard: Stone Optional: Black
WARRANTY	Standard 4-year limited vehicle warranty

MOTOR / DRIVE TRAIN / POWER SUPPLY

MOTOR	48-volt AC Motor
OUTPUT RATING	4.4 hp (3.3kW)
MOTOR CONTROL UNIT	Toyota Industries-built motor controller unit
BATTERIES	Lithium Iron Phosphate
CHARGER	Delta-Q Charger

CHASSIS

FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier and Sunstone colors. Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Swing arm with coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

PERFORMANCE

MAX SPEED ADJUSTABLE	15.0 mph (24 km/h)
MINIMUM TURNING RADIUS	9.0 ft (2.8 m)

DRIVE² EFI

DIMENSIONS

93.6 in (238 cm)
47.3 in (120 cm)
70.2 in (178 cm)
64.4 in (164 cm)
34.8 in (88 cm)
38.3 in (97 cm)
4.3 in (110 mm)
324 kg (714 lb)

GENERAL

FUEL TANK CAPACITY	5.8 U.S. gal (22 liters)
TIRE SIZE	18 x 8.5 - 8 (4-ply rating)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Sunstone, Evergreen, Bluestone, Carbon, Moonstone, Pearl, Glacier
AVAILABLE SEAT & SUN TOP COLOR	Standard: Stone Optional: Black
WARRANTY	Standard 4-year limited vehicle warranty

ENGINE / DRIVE TRAIN

ENGINE TYPE	Yamaha-built, 357 cc, low-emission single cylinder 60° incline OHV
OIL CAPACITY	1 liter, 1000 cc (1 U.S. quart)
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
STARTING SYSTEM	Starter generator with pedal start system
FUEL SYSTEM	EFI - Electronic Fuel Injection

CHASSIS

FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Mold-in Polypropylene for Glacier and Sunstone colors. Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Swing arm with coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, rear wheel drum brakes
BUMPERS	Front and rear 5 mph energy-absorbing bumpers

PERFORMANCE

MAX SPEED ADJUSTABLE	15.0 mph (24 km/h)
MINIMUM TURNING RADIUS	9.2 ft (2.8 m)

UMAX EFI

DIMENSIONS

OVERALL LENGTH	119.4 in (303.0 cm)
OVERALL HEIGHT (NO SUN TOP)	48.54 in (123.3cm)
OVERALL HEIGHT (WITH SUN TOP)	71.6 in (182.5 cm)
OVERALL WIDTH	49.6 in (125.5 cm)
WHEELBASE	77.2 in (196.1 cm)
FRONT WHEEL TREAD	40.3 in (102.5 cm)
REAR WHEEL TREAD	40.2 in (102.0 cm)
MINIMUM GROUND CLEARANCE	4.5 in (11.5 cm)
CURB WEIGHT (WITH SUN TOP, BATTERY, OIL AND GASOLINE)	483 kg (1064 lb)

GENERAL

FUEL TANK CAPACITY	5.2 US GAL (20 LITERS)
TIRE SIZE	20x10-10 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Glacier, Coral Red, Bluestone, Carbon, Evergreen
AVAILABLE SEAT COLORS	Black
AVAILABLE SUN TOP COLORS	Black
WARRANTY	Standard 2-year limited vehicle warranty

ENGINE / DRIVE TRAIN

ENGINE TYPE	Yamaha-built 402 cc, Low Emission Single Cylinder 60° Incline OHV
LUBRICATION SYSTEM	Splash-style positive oil lubrication
OIL CAPACITY	1.16 U.S. quart (1.1 liter, 1100cc), Yamalube 10W-30
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
FUEL SYSTEM	Electronic fuel injection
STARTING SYSTEM	Starter generator with pedal start system
HORSEPOWER	3600 rpm (14.25 hp)

CHASSIS

HybriCore [™] Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
Self-compensating double reduction helical rack-and-pinion
Tru-Trak II [™] fully independent automotive-style strut suspension
Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
Self-adjusting mechanical, front and rear wheel drum brakes
800 lb
1,200 lb
150 lb
1,500 lb
41.1" L x 45.9" W x 11.8" H

PERFORMANCE

MAX FORWARD SPEED	19.5 mph (31.4 km/h)
MAX REVERSE SPEED	13.1 mph (21 km/h)
MINIMUM TURNING RADIUS	4.0 m
G.V.W.	2,533 lb

UMAX AC

DIMENSIONS OVERALL LENGTH 119.4 in (303.0 cm) OVERALL HEIGHT (NO SUN TOP) 48.54 in (123.3 cm) OVERALL HEIGHT (WITH SUN TOP) 71.6 in (182.5 cm) OVERALL WIDTH 49.3 in (125.5 cm) WHEELBASE 77.2 in (196.0 cm) FRONT WHEEL TREAD 40.3 in (102.5 cm) REAR WHEEL TREAD 40.2 in (102.0 cm) MINIMUM GROUND CLEARANCE 4.5 in (11.5 cm) CURB WEIGHT (WITH SUN TOP) 658 kg (1451 lb)

GENERAL

GENERAL		
TIRE SIZE	20x10-10 4-ply Monitor K389 (front) K500 (rear)	
SEATING CAPACITY	Two persons	
AVAILABLE MODEL COLORS	Glacier, Coral Red, Bluestone, Carbon, Evergreen	
AVAILABLE SEAT COLORS	Black	
AVAILABLE SUN TOP COLORS	Black	
WARRANTY	Standard 2-year limited vehicle warranty	
STANDARD RECEIVER HITCH	2"	

MOTOR / DRIVE TRAIN

	MOTOR	48-volt AC
	OUTPUT RATING	6.7 hp (5.0 kW for 60 minutes)
	MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
	BATTERIES	Standard: Eight 6-volt Trojan T-105 Batteries

CHASSIS HybriCore[™] Chassis features a robotic welded automotive ladder-style steel frame protected with

a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
Self-compensating double reduction helical rack-and-pinion
Tru-Trak II™ fully independent automotive-style strut suspension
Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
Self-adjusting mechanical, front and rear wheel drum brakes
800 lb
1,200 lb
150 lb
1,500 lb
41.1" L x 45.9" W x 11.8" H

PERFORMANCE

MAX FORWARD SPEED	19.5 mph (31.4 km/h)
MAX REVERSE SPEED	6.2 mph (10 km/h)
MINIMUM TURNING RADIUS	4.0 m

UMAX Li

DIMENSIONS

OVERALL LENGTH	119.4 in (303.0 cm)
OVERALL HEIGHT (NO SUN TOP)	48.54 in (123.3 cm)
OVERALL HEIGHT (WITH SUN TOP)	71.6 in (182.5 cm)
OVERALL WIDTH	49.3 in (125.5 cm)
WHEELBASE	77.2 in (196.0 cm)
FRONT WHEEL TREAD	40.3 in (102.5 cm)
REAR WHEEL TREAD	40.2 in (102.0 cm)
MINIMUM GROUND CLEARANCE	4.5 in (11.5 cm)
CURB WEIGHT (WITH SUN TOP)	523 kg (1153 lb)

GENERAL

TIRE SIZE	20x10-10 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Coral Red, Bluestone, Evergreen, Carbon, Glacier
AVAILABLE SEAT COLORS	Black
AVAILABLE SUN TOP COLORS	Black
WARRANTY	Standard 2-year limited vehicle warranty
STANDARD RECEIVER HITCH	2"

MOTOR / DRIVE TRAIN

MOTOR	48-volt AC
OUTPUT RATING	6.7 hp (5.0 kW for 60 minutes)
MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
BATTERIES	RoyPow S51105PE (51-Volt)

CHASSIS

FRAME	HybriCore [™] Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive- gradepolyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, front and rear wheel drum brakes
CARGO BED MAX LOAD	800 lb
ROLLING TRAILER MAX WEIGHT	1,200 lb
MAX TONGUE WEIGHT	150 lb
VEHICLE RATED CAPACITY	1,500 lb
CARGO BED DIMENSIONS	41.1" L x 45.9" W x 11.8" H

PERFORMANCE

MAX FORWARD SPEED	19.5 mph (31.4 km/h)
MAX REVERSE SPEED	6.2 mph (10 km/h)
MINIMUM TURNING RADIUS	4.0 m

UMAX RANGE PICKER EFI

DIMENSIONS

DIMENSIONS	
OVERALL LENGTH	111.45 in (283.1 cm)
OVERALL HEIGHT (NO SUN TOP)	48.54 in (123.3 cm)
OVERALL HEIGHT (WITH SUN TOP)	71.81 in (182.4 cm)
OVERALL WIDTH	49.5 in (125.7 cm)
WHEELBASE	66.18 in (168.1 cm)
FRONT WHEEL TREAD	39.96 in (101.5 cm)
REAR WHEEL TREAD	40.19 in (102.1 cm)
MINIMUM GROUND CLEARANCE	4.56 in (11.6 cm)
CURB WEIGHT (WITH SUN TOP AND RANGE CAGE COMPLETE ENCLOSURE)	498 kg (1097 lb)

GENERAL

GENERAL	
TIRE SIZE	20x10-10 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Coral Red, Bluestone, Evergreen, Carbon, Glacier
AVAILABLE SEAT & SUN TOP COLOR	Black
WARRANTY	Standard 2-year limited vehicle warranty

ENGINE / DRIVE TRAIN

ENGINE TYPE	Yamaha-built 402 cc, Low Emission Single Cylinder 60° Incline OHV
LUBRICATION SYSTEM	Splash-style positive oil lubrication
OIL CAPACITY	1.16 U.S. quart (1.1 liter, 1100 cc), Yamalube 10W-30
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
FUEL SYSTEM	Electronic fuel injection
STARTING SYSTEM	Starter generator with pedal start system
HORSEPOWER	3600 rpm (14.25 hp)

CHASSIS

CHASSIS	
FRAME	HybriCore [™] Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, front and rear wheel drum brakes
CARGO BED CAPACITY	300 lb
TOWING CAPACITY	800 lb
CARGO BED DIMENSIONS	33.2" L x 45.9" W x 11.8" H

PERFORMANCE

MAX FORWARD SPEED	17.5 mph (28 km/h)
MAX REVERSE SPEED	13.1 mph (21 km/h)
MINIMUM TURNING RADIUS	3.5 m
G.V.W.	2,910 lb

UMAX RANGE PICKER Li

DIMENSIONS	
OVERALL LENGTH	111.45 in (283.1 cm)
OVERALL HEIGHT (NO SUN TOP)	48.54 in (123.3 cm)
OVERALL HEIGHT (WITH SUN TOP)	71.81 in (182.4 cm)
OVERALL WIDTH	49.5 in (125.7 cm)
WHEELBASE	66.18 in (168.1 cm)
FRONT WHEEL TREAD	39.96 in (101.5 cm)
REAR WHEEL TREAD	40.19 in (102.1 cm)
MINIMUM GROUND CLEARANCE	4.56 in (11.6 cm)
CURB WEIGHT (WITH SUN TOP AND RANGE CAGE COMPLETE ENCLOSURE)	498 kg (1097 lb)

GENERAL

TIRE SIZE	20x10-10 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Coral Red, Bluestone, Evergreen, Carbon, Glacier
AVAILABLE SEAT & SUN TOP COLOR	Black
WARRANTY	Standard 2-year limited vehicle warranty

MOTOR / DRIVE TRAIN

MOTOR	48-volt AC
OUTPUT RATING	6.7 hp (5.0 kW for 60 minutes)
MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
BATTERIES	RoyPow S51105PE (51-Volt)

CHASSIS

FRAME	HybriCore [™] Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive- gradepolyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with DUAL RATE coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, front and rear wheel drum brakes
CARGO BED CAPACITY	300 lb
TOWING CAPACITY	800 lb
CARGO BED DIMENSIONS	41.1" L x 45.9" W x 11.8" H

PERFORMANCE

MAX FORWARD SPEED	19.5 mph (31.4 km/h)
MAX REVERSE SPEED	6.2 mph (10 km/h)
MINIMUM TURNING RADIUS	4.0 m
G.V.W.	2,910 lb

UMAX BISTRO EFI

DIMENSIONS	
OVERALL LENGTH	127.60 in (324.1 cm)
OVERALL HEIGHT (NO SUN TOP)	48.54 in (123.3 cm)
OVERALL HEIGHT (WITH SUN TOP)	74.02 in (188 cm)
OVERALL WIDTH	49.5 in (125.7 cm)
WHEELBASE	77.2 in (196.1 cm)
FRONT WHEEL TREAD	40.27 in (102.3 cm)
REAR WHEEL TREAD	40.19 in (102.1 cm)
MINIMUM GROUND CLEARANCE	4.52 in (11.5 cm)
CURB WEIGHT	554 kg (1,221 lb)
GENERAL	
TIRE SIZE	20x10-10 6-ply Kenda K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Coral Red, Bluestone, Evergreen, Carbon, Glacier
AVAILABLE SEAT COLORS	Black
AVAILABLE SUN TOP COLORS	Black
WARRANTY	Standard 2-year limited vehicle warranty
ENGINE / DRIVE TRAIN	
ENGINE TYPE	Yamaha-built 402 cc, Low Emission Single Cylinder 60° Incline OHV
LUBRICATION SYSTEM	Splash-style positive oil lubrication
OIL CAPACITY	1.16 U.S. quart (1.1 liter, 1100cc), Yamalube 10W-30
AIR CLEANER	Two-stage, urethane-foam pre-cleaner, and high-capacity pleated paper cartridge
COOLING SYSTEM	Forced air
FUEL SYSTEM	Electronic fuel injection
STARTING SYSTEM	Starter generator with pedal start system
HORSEPOWER	3600 rpm (14.25 hp)
CHASSIS	
FRAME	HybriCore™ Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive-grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with heavy duty coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, front and rear wheel drum brakes
CARGO BED MAX LOAD	800 lb
ROLLING TRAILER MAX WEIGHT	1,200 lb
MAX TONGUE WEIGHT	150 lb

PERFORMANCE

MAX FORWARD SPEED	17.5 mph (28 km/h)
MAX REVERSE SPEED	13.1 mph (21 km/h)
MINIMUM TURNING RADIUS	3.98 m
G.V.W.	1,995 lb (Standard)

UMAX BISTRO Li

DIMENSIONS

OVERALL LENGTH	127.60 in (324.1 cm)
OVERALL HEIGHT (NO SUN TOP)	48.54 in (123.3 cm)
OVERALL HEIGHT (WITH SUN TOP)	74.02 in (188 cm)
OVERALL WIDTH	49.5 in (125.7 cm)
WHEELBASE	77.2 in (196.1 cm)
FRONT WHEEL TREAD	40.27 in (102.3 cm)
REAR WHEEL TREAD	40.19 in (102.1 cm)
MINIMUM GROUND CLEARANCE	4.52 in (11.5 cm)
CURB WEIGHT	554 kg (1,221 lb)

GENERAL

TIRE SIZE	20x10-10 4-ply Monitor K389 (front) K500 (rear)
SEATING CAPACITY	Two persons
AVAILABLE MODEL COLORS	Coral Red, Bluestone, Evergreen, Carbon, Glacier
AVAILABLE SEAT & SUN TOP COLOR	Black
WARRANTY	Standard 2-year limited vehicle warranty

MOTOR / DRIVE TRAIN

MOTOR	48-volt AC
OUTPUT RATING	6.7 hp (5.0 kW for 60 minutes)
MOTOR CONTROL UNIT	NEOS 350 amp AC controller by Toyota Industries Corporation
BATTERIES	RoyPow S51105PE (51-Volt)

CHASSIS

FRAME	HybriCore [™] Chassis features a robotic welded automotive ladder-style steel frame protected with a multi-step full-immersion phosphate treatment, electro-deposition epoxy-based coating, and an electrostatic applied polyester/urethane powder topcoat
BODY	Custom-formulated thermoplastic olefin painted with a two-part top coat of high-luster automotive- grade polyurethane
STEERING	Self-compensating double reduction helical rack-and-pinion
FRONT SUSPENSION	Tru-Trak II™ fully independent automotive-style strut suspension
REAR SUSPENSION	Unit swing arm with heavy duty coil springs over hydraulic shock absorbers
BRAKES	Self-adjusting mechanical, front and rear wheel drum brakes
CARGO BED MAX LOAD	800 lb
ROLLING TRAILER MAX WEIGHT	1,200 lb
MAX TONGUE WEIGHT	150 lb
VEHICLE RATED CAPACITY	1,500 lb
COLD STORAGE DIMENSIONS	39.2" L x 47.5" W x 15.25" H

PERFORMANCE	
MAX FORWARD SPEED	19.5 mph (31.4 km/h)
MAX REVERSE SPEED	6.2 mph (10 km/h)
MINIMUM TURNING RADIUS	4.0 m
G.V.W.	1,995 lb (Standard)





1270 Chastain Road NW Kennesaw, Georgia 30144 1.866.747.4027 | YamahaGolfCar.com



This document contains many of the valuable trademarks and service marks owned and used by Yamaha throughout the world. The document may also contain references to other company, brand, and product names that may be the trademarks/service marks of their respective owners. Unless noted otherwise, these company, brand, and product names are used herein for identification purposes only, and reference to any names, marks, products, or services of third parties do not constitute or imply endorsement, sponsorship, or recommendation of the third party or the product or services. Products and specifications are subject to change without notice.